

b i b u l c a

INSO

TILES

collection



Bibulca Esagona Black • Grey • White 17x20,5

TILES
collection

BIBULCA

TILES
collection



Bibulca White 60x60 • 60x120



Bibulca White 60x60 • Esagona 17x20,5 White • Taupe • Black • Decoro Classic

TILES
collection

BIBULLCA

TILES
collection



BLACK



GREY



TAUPE



WHITE

Bibulca Grey 60x60 • 60x120 Decoro Caribbean 60x120

VIA IMPERIALE

TILES
collection



Bibulca Taupe 30x120 • Esagona Decoro Orient 17x20,5




Bibulca White 60x60 • Via Imperiale White 30x90 • Rock White 30x90


FORMATI



Rettificato spessore 9 mm.	indoor R 9 a+b	spessore 9 mm.	outdoor R 11 a+b+c
Black indoor	BIBLINR61	Black outdoor	BIBLOUR61
Grey indoor	BIGRINR61	Grey outdoor	BIGROUR61
Taupe indoor	BITAINR61	Taupe outdoor	BITAOUR61
White indoor	BIWHINR61	White outdoor	BIWHOUR61



Rettificato spessore 9 mm.	indoor R 9 a+b	spessore 9 mm.	outdoor R 11 a+b+c
Black indoor	BIBLINR60	Black outdoor	BIBLOUR60
Grey indoor	BIGRINR60	Grey outdoor	BIGROUR60
Taupe indoor	BITAINR60	Taupe outdoor	BITAOUR60
White indoor	BIWHINR60	White outdoor	BIWHOUR60




Rettificato spessore 9 mm.	indoor R 9 a+b	spessore 9 mm.	outdoor R 11 a+b+c
Black indoor	BIBLINR30	Black outdoor	BIBLOUR30
Grey indoor	BIGRINR30	Grey outdoor	BIGROUR30
Taupe indoor	BITAINR30	Taupe outdoor	BITAOUR30
White indoor	BIWHINR30	White outdoor	BIWHOUR30




Rettificato spessore 8,5 mm.	indoor R 9
Black	BIES2BL20
Grey	BIES2GR20
Taupe	BIES2TA20
White	BIES2WH20

SOTTOFORMATI




Rettificato spessore 9 mm.	indoor R 9 a+b
Black indoor	BIBLI3030
Grey indoor	BIGRI3030
Taupe indoor	BITAI3030
White indoor	BIWHI3030




Rettificato spessore 9 mm.	indoor R 9 a+b
Black indoor	BIBLI1515
Grey indoor	BIGRI1515
Taupe indoor	BITAI1515
White indoor	BIWHI1515

PEZZI SPECIALI



Battiscopa 7x60	
Black	BIBLACBAT
Grey	BIGRIGBAT
Taupe	BITAUPBAT
White	BIWHITBAT



Mosaico 5x5 - 30x30	
Black	BIBBLMO55
Grey	BIBGRMO55
Taupe	BIBTAMO55
White	BIBWHMO55

BIBULCA

TILES
collection

FORMATI

Caribbean




Orchid





Rettificato
spessore 9 mm.

Caribbean 60x120 BICARDE61
Orchid 60x120 BIORCHDE61

Classic

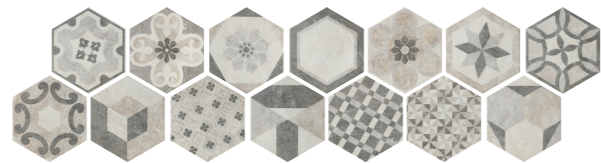


Latin

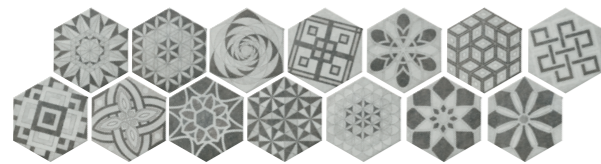


Rettificato
spessore 8,5 mm. indoor R 9
Classic BIES2CL20
Frame BIES2FR20
Latin BIES2LA20
Orient BIES2OR20

Frame

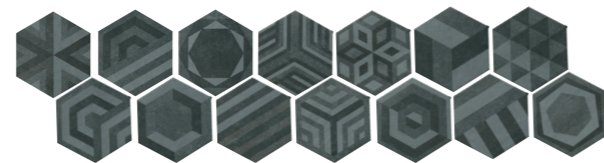

Orient

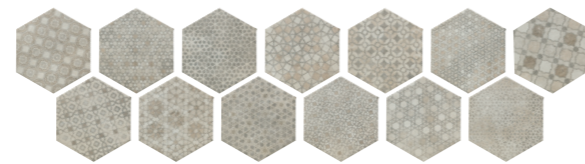


VIA IMPERIALE

TILES
collection

BIBULCA

RIVESTIMENTO

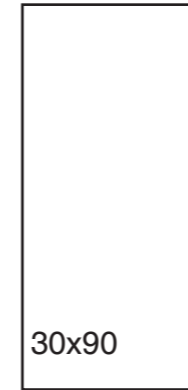

Rettificato
spessore 8,7 mm.

Grey 30x90 VI3090GRE
Taupe 30x90 VI3090TAU
White 30x90 VI3090WHI

Rettificato
spessore 8,7 mm.

Rock Grey 30x90 VI3090ROG
Rock Taupe 30x90 VI3090ROT
Rock White 30x90 VI3090ROW



Rivestimento pasta bianca • Faience pate blanche • Wall tile

IMBALLI

FORMATO		PZ/BOX	MQ/BOX	KG/BOX	BOX/PAL	MQ/PAL	KG/PAL
60x120	R 9	2	1,44	29,79	36	51,84	1072,48
60x120	R 11	2	1,44	29,79	36	51,84	1072,48
60x60	R 9	3	1,08	21,87	40	43,20	874,63
60x60	R 11	3	1,08	21,87	40	43,20	874,63
30x60	R 9	6	1,08	21,69	48	51,84	1041,02
30x60	R 11	6	1,08	21,69	48	51,84	1041,02
20x17,5	Esagona R 9	25	0,714	13,27	80	57,12	1061,60
20x17,5	Decorata	25	0,714	13,27	80	57,12	1061,60
15x15	R 9	44	1,00	20,25	40	40,00	810,00
30x30	R 9	12	1,08	21,69	34	36,72	737,34
Battiscopa	7x60	10		9,11			
Mosaico 5x5	30x30	6		21,86			
30x90		5	1,35	20,54	63	85,05	1294,02
30x90	Rock	5	1,35	20,54	63	85,05	1294,02



STONE
collect

Dolomiti Multi 15,2x61,5

caratteristiche tecniche

technical specifications • caractéristiques techniques

Bibulca

CARATTERISTICA TECNICA technical characteristic caractéristique technique	NORMA DI RIFERIMENTO standard reference norme de référence	VALORE RICHIESTO value required valeur prescrite par la norme	RISPONDEZZA ALLA NORMA compliance with the standard conformance à la norme
CARATTERISTICHE DIMENSIONALI size characteristics caractéristiques dimensionnelles	ISO 10545-2	lunghezza e larghezza/ length and width/ longueur et largeur $\pm 0,3\%$ spessore / thickness / épaisseur $\pm 5\%$ ortogonalità/ widening / orthogonalité $\pm 0,3\%$ planarità/ flatness / planéité $\pm 0,4\%$	conforme
Caratteristiche di qualità Qualità della superficie Surface Quality		95% delle piastrelle deve essere esente da difetti visibili 95% of tiles shall be free from visible defects	
ASSORBIMENTO D'ACQUA water absorption absorption d'eau	ISO 10545-3	$\leq 0,5 \%$	Eb $\leq 0,5$ (valore massimo individuale 0,6%)
FORZA DI ROTTURA breaking strength résistance à la flexion	ISO 10545-4	$\geq 35/\text{mm}^2$	
RESISTENZA ALLA FLESSIONE bending strength résistance à la flexion	ISO 10545-4	≥ 1300	≥ 1300 (spessore $\geq 7,5$ mm) ≥ 700 (spessore $< 7,5$ mm)
COEFFICIENTE DI DILATAZIONE TERMICA LINEARE linear thermal expansion coefficient coefficient de dilatation thermique linéaire	ISO 10545-8	≤ 9	
RESISTENZA AGLI SBALZI TERMICI thermal shock resistance résistance aux chocs thermiques	ISO 10545-9	conforme alla norma	resistente
RESISTENZA AL GELO frost resistance résistance au gel	ISO 10545-12	conforme alla norma	resistente
RESISTENZA AI PRODOTTI CHIMICI resistance to chemicals résistance aux produits chimiques	ISO 10545-13	HA-HB	
RESISTENZA ALLE MACCHIE stain resistance résistance aux taches	ISO 10545-14	Classe 5	Minimo classe 3 (EN 14411:2016) Minimo classe 3 (iso 13006:2018)
RILASCIO SOST. PERICOLOSE Pb-Cd determination of Pb and Cd given off reject de substances dangereuses Pb-Cd	ISO 10545-15	conforme	
FATTORE DI RESISTENZA ALLA SCI-VOLOSITA' anti-slip properties résistance à la glissance	DIN 51130	finitura indoor R9 finitura outdoor R11	R 9 a+b R 11 a+b+c
DUREZZA DELLA SUPERFICIE MOHS scratch hardness of surf. MOHS dureté de la surface MOHS	EN 101 BS 6431 part 13	≥ 5	

SCAN ME.



IMSO Website

IMSO s.r.l.
Via Mantegna, 2
42048 Rubiera (RE)
P.Iva 01646810356
Tel +39 0522 999135
Fax +39 0522 999105

IMSO

Sales Manager:
cristiano@imsoceramiche.com

-

Sales Assistants
antonella@imsoceramiche.com
monia@imsoceramiche.com
nadia@imsoceramiche.com
roberta@imsoceramiche.com

-

Account Administration:
paola@imsoceramiche.com
laura@imsoceramiche.com

FOLLOW US.



#imsodesign

info@imsoceramiche.com
www.imsoceramiche.com